

CONTENTS


PREFACE.....	2
CONTENTS OF PACKAGE.....	3
TECHNICAL SPECIFICATION.....	4
REAR PANEL TERMINALS.....	5
SAFETY RECOMMENDATIONS - PLACEMENT	6
SAFETY RECOMMENDATIONS - OPERATION	7
FIRST INSTALLATION	8
CONNECTING.....	9
WASTE MANAGEMENT	10
MARKINGS.....	10
WARRANTY.....	11
DECLARATION OF CONFORMITY.....	12

PREFACE

Before installing the **qualiton MC**, please study this user manual carefully!


Operating your phono stage in a manner it is designed for ensures you an utmost musical experience and a reliable operation.

If you have any questions on our products or services, please do not hesitate to contact us on our website **www.audiohungary.com**

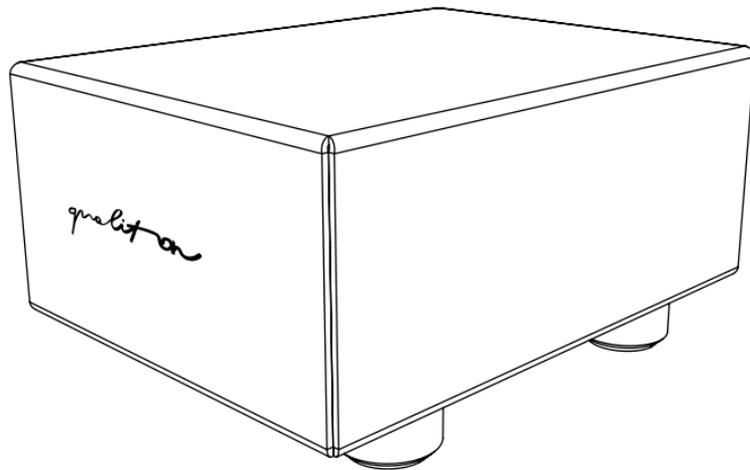

CONTENTS OF PACKAGE

- 1pc qualiton MC
- 1pc user manual

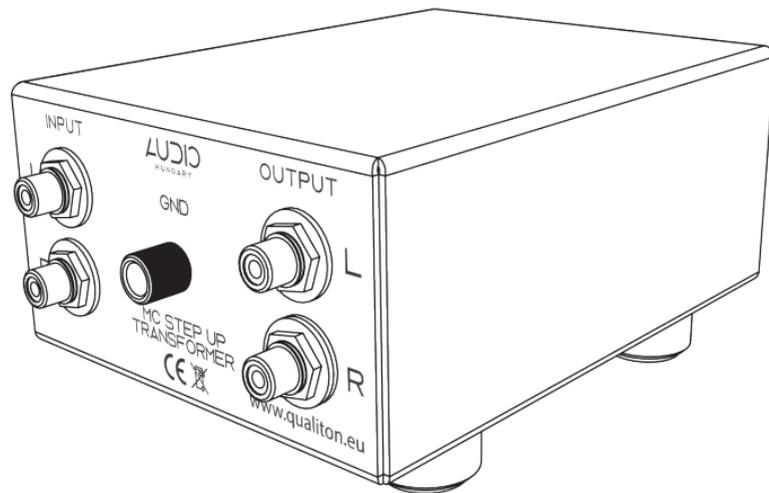

TECHNICAL SPECIFICATION

NOMINAL OUTPUT LEVEL

5 mV

INPUT SENSITIVITY

0.325 mV

NUMBER OF INPUT PORTS

1 unbalanced input per channel

NUMBER OF OUTPUT PORTS

1 unbalanced output per channel

TURN RATIO

1:18; 1:30

TOTAL HARMONIC DISTORTION

< 0.02% (nominal output level)

FREQUENCY RESPONSE

5 Hz - 90 kHz (-3 dB)

NOMINAL SOURCE IMPEDANCE

2 - 10 Ω ; 10 - 50 Ω ;
factory tuning based on individual needs

NOMINAL LOAD IMPEDANCE

47 k Ω

INPUT IMPEDANCE

145 Ω ; 50 Ω


GAIN (WITH NOMINAL LOAD)

+24 dB; +30 dB

WEIGHT

1 kg

REAR PANEL TERMINALS

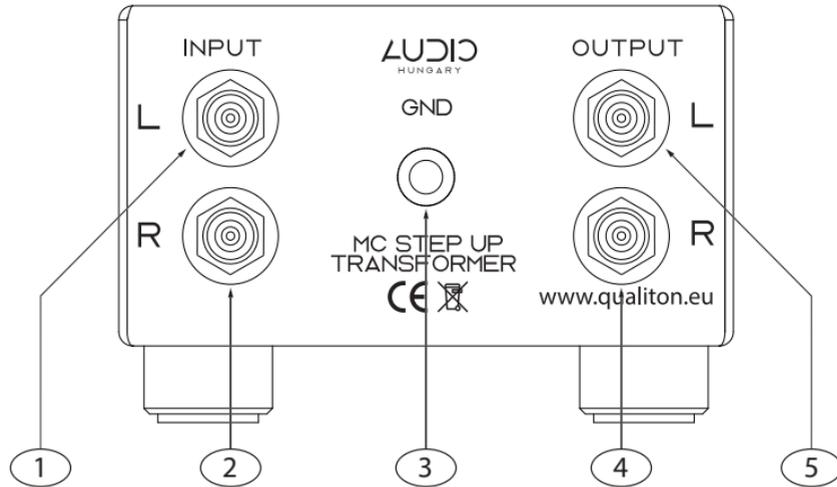


- ① Left side RCA input (L)
- ② Right side RCA input (R)
- ③ Grounding screw
- ④ Right side RCA output (R)
- ⑤ Left side RCA output (L)

SAFETY RECOMMENDATIONS - PLACEMENT


- Avoid relocating the appliance from cold to warm surroundings! Sudden temperature changes can lead to moisture condensation. Please wait until moisture is evaporated before putting your mc into operation!
- The aforesaid applies to the very first installation of the MC as well. Prior to the first installation, leave the MC at its place of operation at least for 2 hours. Once this time is over, the MC can be powered up!
- The appliance is designed for indoor use. Do not operate it in wet, humid surroundings!
- Do not store any electrical device or object in a perimeter of 200 millimetres around your qualiton MC!

- Do not use the appliance next to heating sources and radiators! Keep it away from hot or dusty environment and flame!

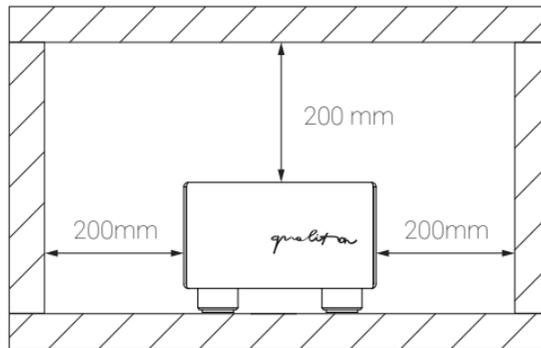


SAFETY RECOMMENDATIONS - OPERATION

- Improper installation may cause breakdown!
- Before powering up your MC, make sure cover, ports, plugs and cables are checked for intactness!
- You must not start up damaged or faulty appliance. In case of any malfunction, unplug your MC immediately!
- Components must not be changed or repaired by the user. In case of a malfunction, the cover must not be opened or removed!
- In case of an emergency, unplug your MC immediately!
- In case of a faulty operation, contact our service.!
- Improper repair may lead to a loss of warranty!
- The appliance may only be used by qualified adults or children above 14 years of age if supervised by a qualified adult!
- Keep the appliance out of the reach of children!
- Make sure your domestic animal does not lie or sit on the top of the appliance!

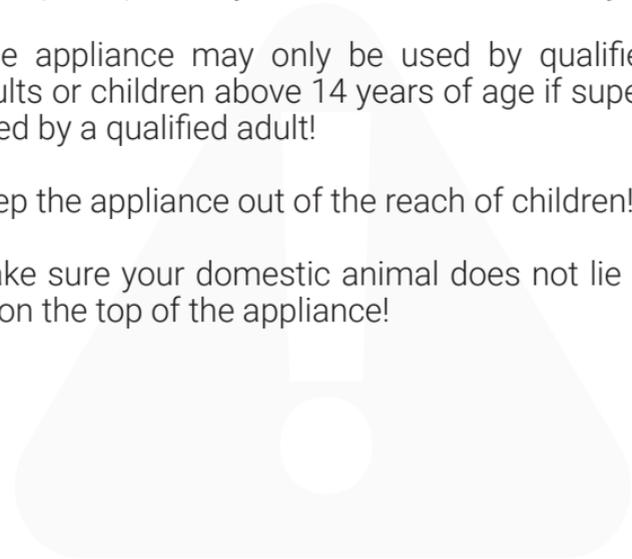


SAFETY RECOMMENDATIONS - OPERATION

- If you do not use your MC for a long time, unplug the appliance carefully!
- Do not block the openings of your MC since this may lead to fire or electric shock!

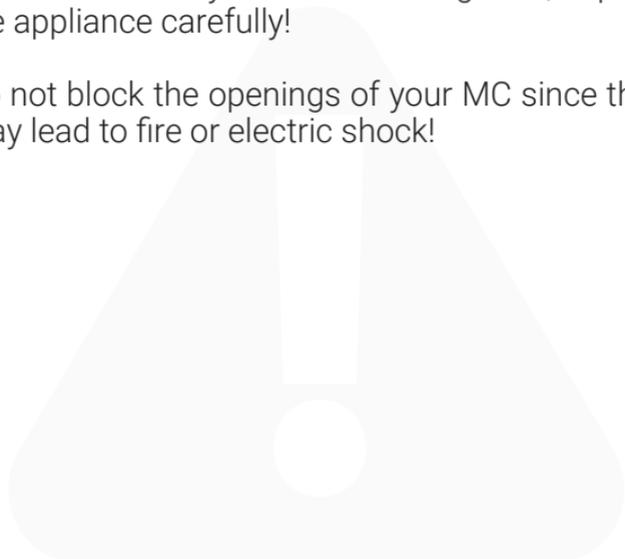


FIRST INSTALLATION

- Connect your MC to the other elements of your sound system according to the connection diagram!
- Plug in your appliance!

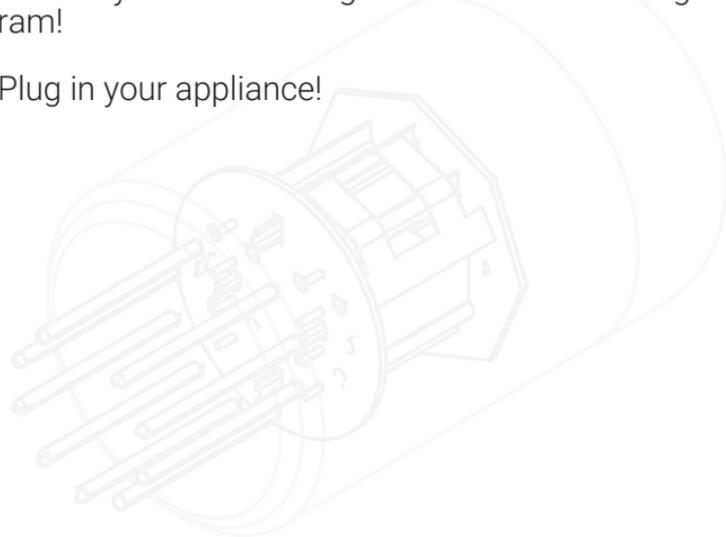

CONNECTING

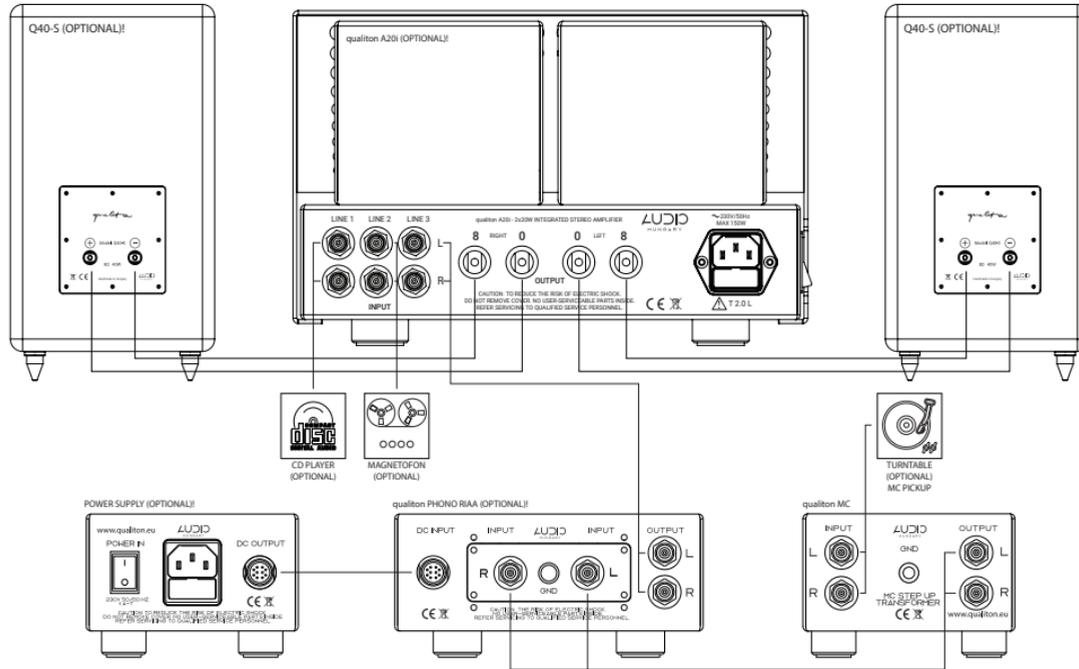

WASTE MANAGEMENT

- The appliance and its packaging are made of recyclable materials.
- The appliance contains repairable or recyclable components and materials. Waste separation makes their recycling possible.
- A faulty appliance or an appliance meant to be discarded has to be sent or brought to an adequate waste collection place or to our company site!
- For further information on waste disposal please contact our company or local authorities.

MARKINGS

-  - The product meets the directives and standards of the European Union.
-  - Product requiring waste separation.

WARRANTY

The serial number of your appliance (engraved on a metal plate) is placed on its bottom. Please refer to this number while contacting our company.

-
- | NOMINAL SOURCE IMPEDANCE | TURN RATIO |
|---|-------------------------------|
| <input type="checkbox"/> 2 - 10 Ω | <input type="checkbox"/> 1:30 |
| <input type="checkbox"/> 10 - 50 Ω | <input type="checkbox"/> 1:18 |